
EC784 FLUSH FIT

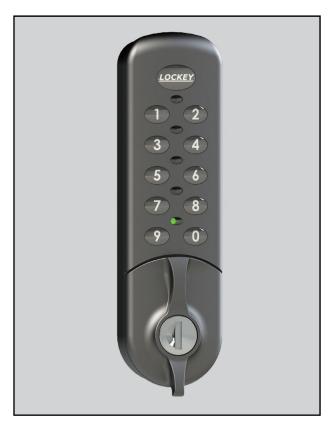

FEATURES

Public, Private & Remote Allocation System (RAS) mode Key override

Up to 80,000 cycles per pair of AA batteries

Batteries included

Battery condition indicator

Audible keypad (can be turned on/off)

8 digit master code

6 digit sub-master code

4 digit user codes

6 digit technician code

Auto unlock mode (can be turned on/off)

OPTIONS

Finishes: Black (B), Silver (S), Custom*

Keypad Direction: Vertical (V), Right (R), Left (L)

Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

Length: 143.5mm (5.65") Width: 41mm (1.61") Depth: 11.5mm (.45")

Internal Dimensions:

Length: 142mm (5.6") Width: 42.6mm (1.68") Depth: 37.5mm (1.48")


Mounting Hole Shape: 3 point mounting (see technical drawing)

Spindle Length: 20mm standard, 24mm by special order*

Power: 2 x AA Battery (Alkaline)

Low Battery: LED lights with battery condition indicator

Material: Zinc diecast Finish: Powder coated Keys Included: 2 For Internal Use

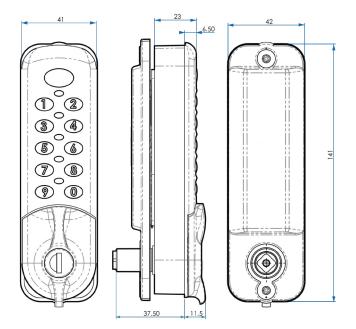

ORDERING INFORMATION

Order # for EC784 shown above is EC784BV

Order #FinishKeypad DirectionRASEC784(B) Black(V) VerticalRAS

(S) Silver (R) Right Custom* (L) Left