

The Unilec logo is displayed in a large, white, sans-serif font. A thick white horizontal line is positioned below the letters 'i' and 'l', extending across the width of the text.

# Unilec



INNOVATION

EASY TO INSTALL

WEATHERPROOF



## Electric insert keep for insert lock

UNIWINING-compatible

This innovative electric keep pushes the daybolt outward and allows flexible positioning within the post.






Unilec C



Unilec Z

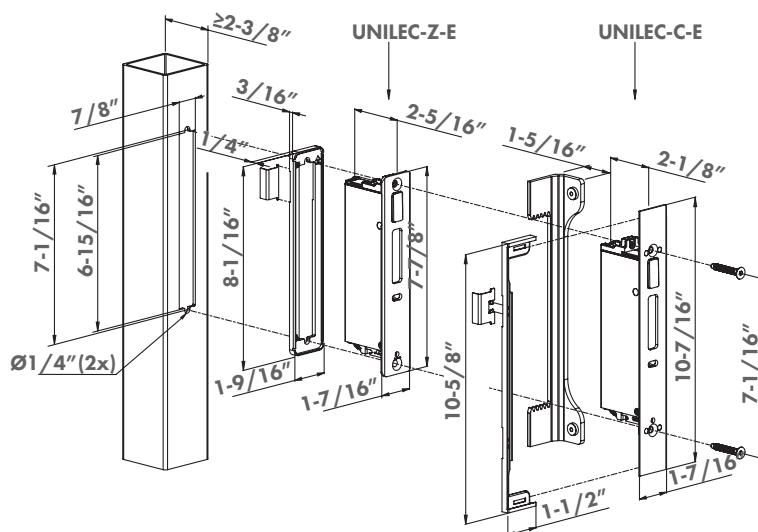

# Unilec

## Electric insert keep for insert locks

This innovative electric keep pushes the latch bolt outward and allows flexible positioning within the post. UNILEC fits perfectly into the UNIWINING profile preparation and is easily mounted with the CLICK-IT system. The sleek finish minimizes the gap between gate and post. The keep operates on 24V DC and is available with or without a stop plate. Extra security is ensured by the Fail-Close functionality.

## What makes it special?

- Pushes day bolt outward
- Integrated Click-It installation system
- UNIWINING-compatible
- Easy left or right changing
- Adjustable stop plate for 1-9/16" till 1-15/16" gate frames
- Compatible with FORTY-, FIFTY-, SIXTY- & EIGHTYLOCK



## Features

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Configurations      | UNILEC-C: with stop plate<br>UNILEC-Z: without stop plate                                      |
| Profile size        | UNILEC-C: gate profiles 1-9/16" and 1-15/16"<br>UNILEC-Z: any gate profile                     |
| Post Profile        | Minimum 2-3/8"                                                                                 |
| Built-in Depth      | 2-2/16"                                                                                        |
| Profile preparation | Locinox Uniwing cut-out                                                                        |
| Material            | Stop plate: aluminum<br>Housing: anodized aluminum<br>Critical components: stainless steel     |
| Color               | RAL9005, uncolored                                                                             |
| Fixation            | Locinox Click-It technology                                                                    |
| Compatibility       | Locinox Uniwing product portfolio                                                              |
| Power supply        | 24V DC                                                                                         |
| Power consumption   | 55W peak load (400 ms)<br>3W reduced load (trigger time 400 ms)<br>0W retracted state (closed) |
| Weather resistance  | IP56                                                                                           |
| Warranty            | 2 years                                                                                        |